



Professional LED Light Manufacturer
Since 2008

www.wilgex-led.com

(86) 769-28820681

info@wilgex-led.com

LED NEON FLEX


Dia 30a mm
320 DEGREE

MONO COLOR
12V/24V


SKU:WJ-SNF-D30a-MONO-12V/24V




Structural Drawing & Bending Direction

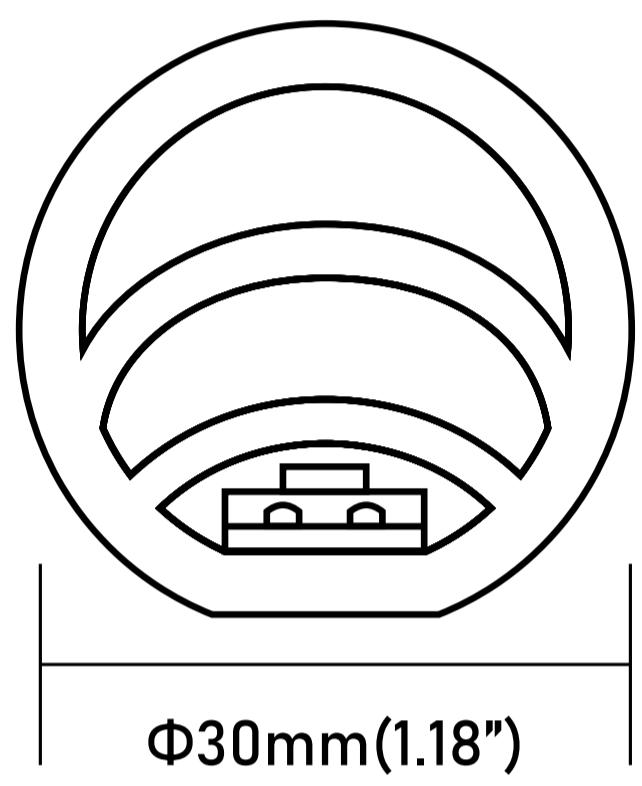

CIRCLE / LIGHT BEAM ANGLE:320°

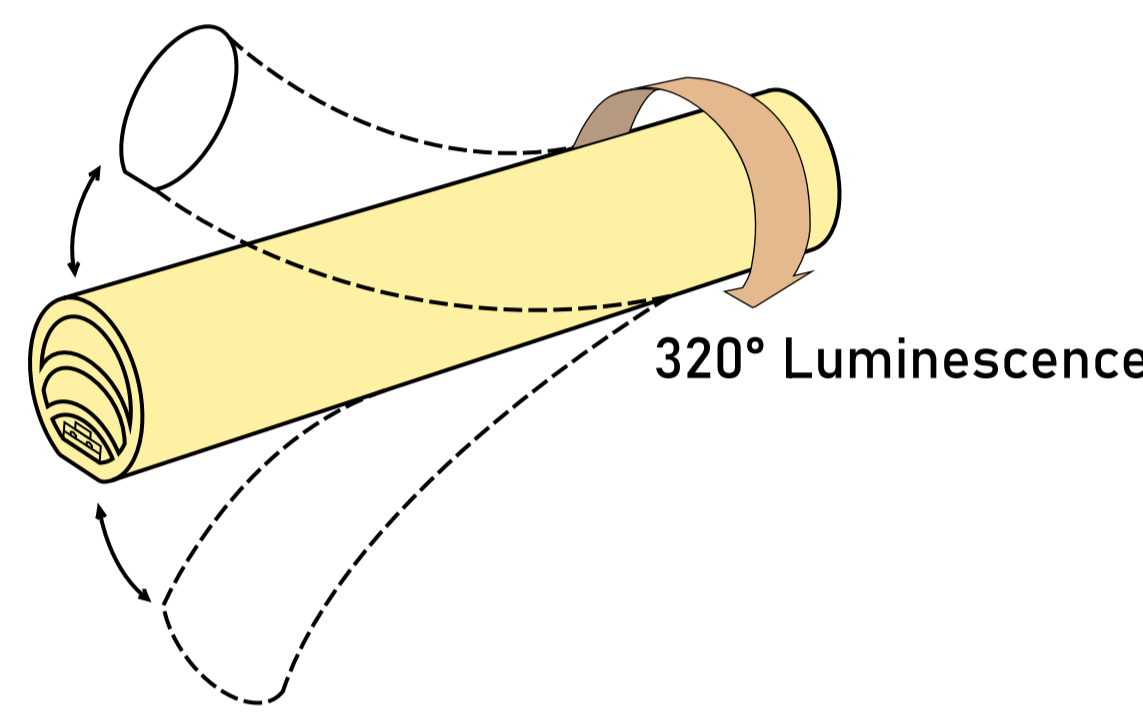

BENDING DIRECTION:
VERTICAL

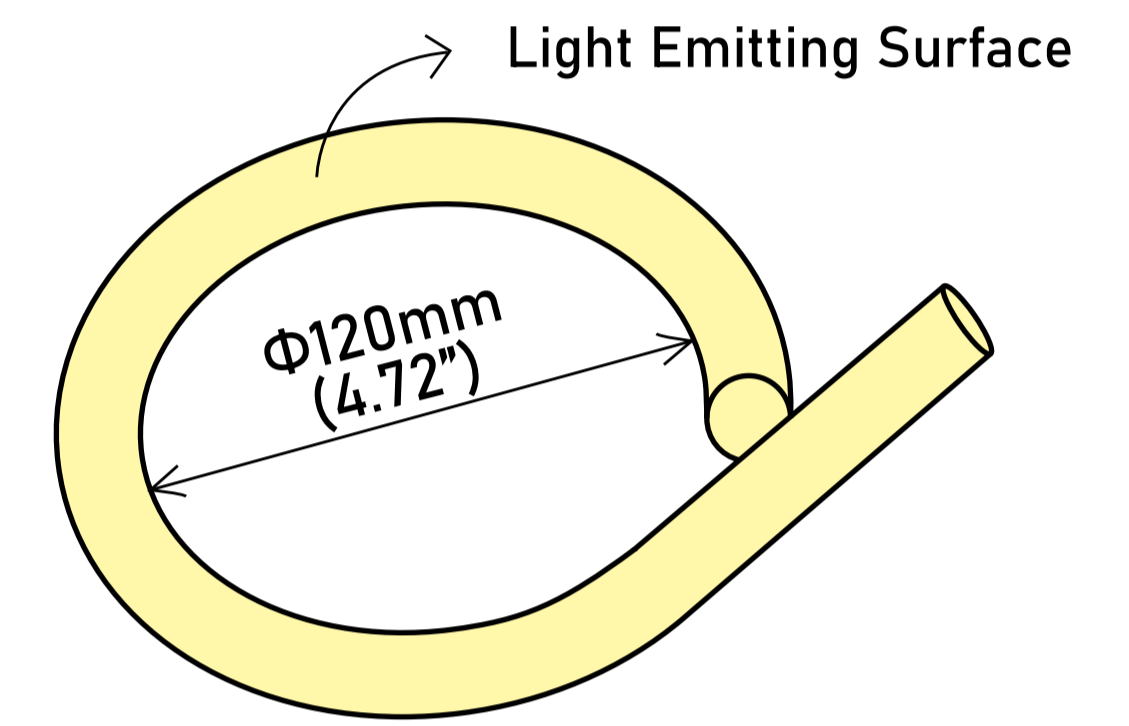

MINIMUM BENDING DIAMETER

Certifications




Technical Data

Color temperature : 2200K ● ● ● ● ● 10000K

ALL COLOS MAX LOADING: 5m

COLOR	CCT/WAVE	LED QUANTITY	UNIT CUT (12V)	UNIT CUT (24V)	WATTS/M (24V)	LUMEN/M (24V)
Warm White	2737K/584.7nm	120 LEDs/m	2.5cm	5cm	8.34 W	322.02 lm
Cool White	9145K/471.5nm	120 LEDs/m	2.5cm	5cm	8.37 W	305.18 lm
Red	1007K/623.3nm	120 LEDs/m	2.5cm	5cm	7.77 W	134.81 lm
Green	8120K/526.3nm	120 LEDs/m	2.5cm	5cm	8.55 W	334.04 lm
Blue	465.3nm	120 LEDs/m	2.5cm	5cm	8.76 W	46.30 lm
Yellow	1901K/588.8nm	120 LEDs/m	2.5cm	5cm	8.36 W	366.57 lm
Orange	1082K/604.9nm	120 LEDs/m	2.5cm	5cm	8.35 W	226.69 lm
Light Pink	1511K/626.0nm	120 LEDs/m	2.5cm	5cm	8.34 W	294.00 lm
Pink (Violet)	568.0nm	120 LEDs/m	2.5cm	5cm	8.03 W	92.24 lm
Purple	450.0nm	120 LEDs/m	2.5cm	5cm	8.16 W	58.71 lm

Optical Parameter Chart for Integrating Sphere Testing

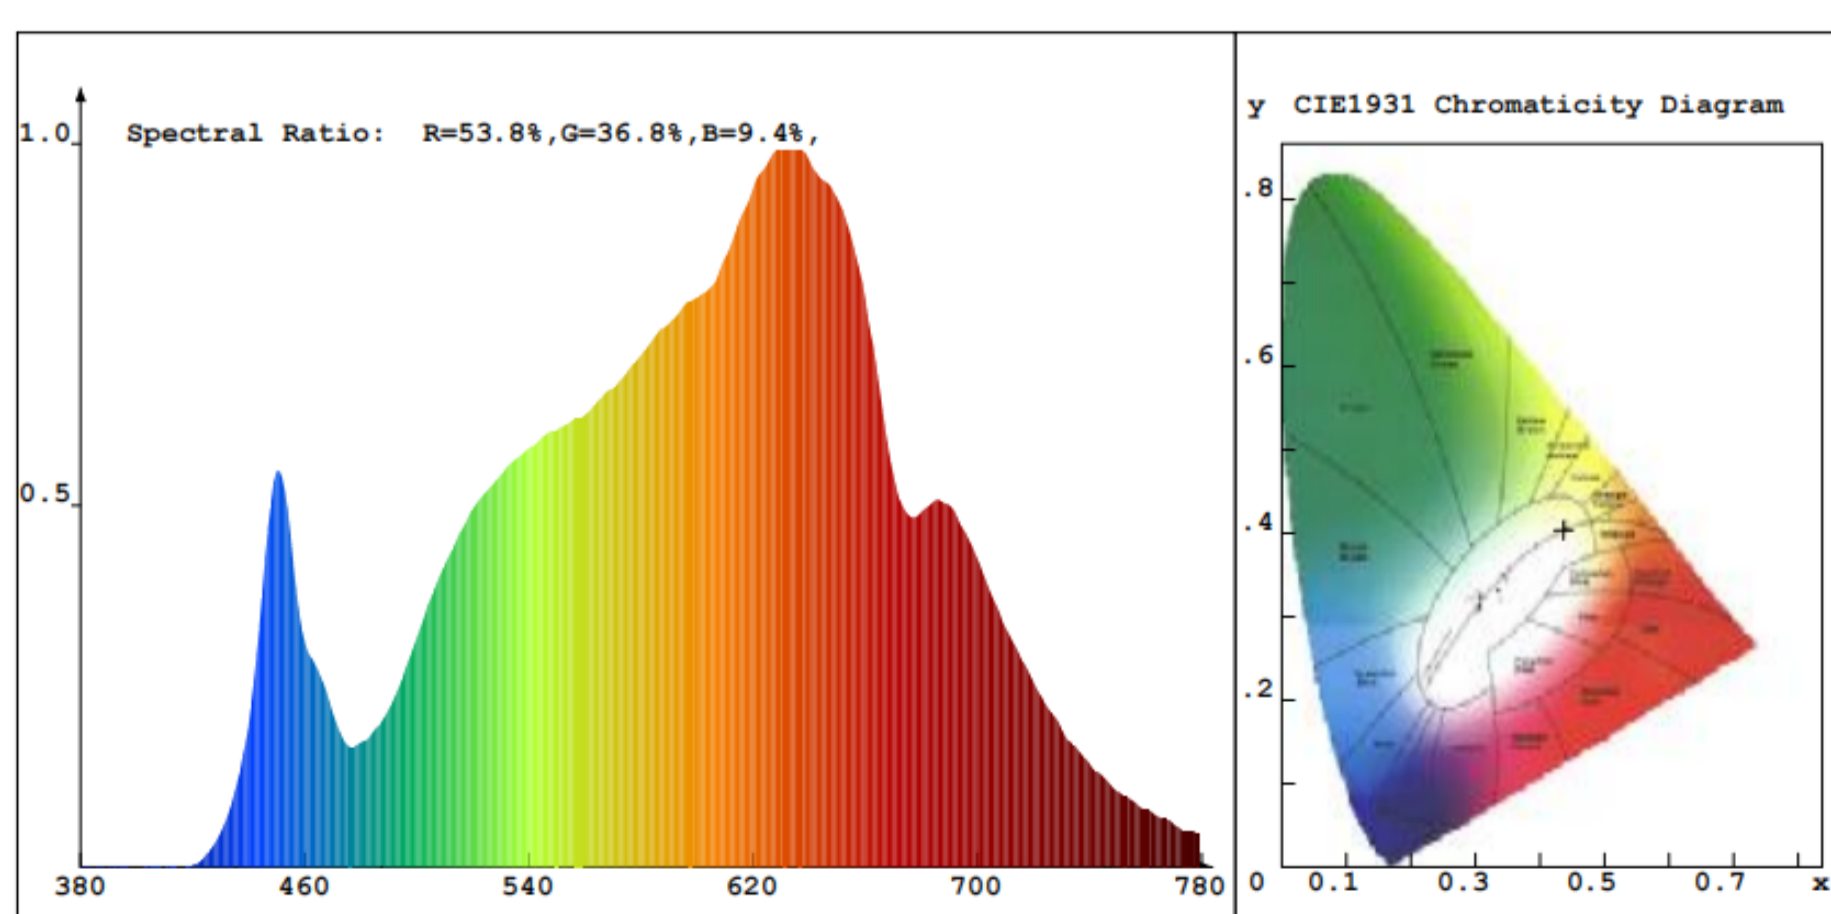


Reliability test


TEST CATEGORY	TEST ITEMS	STANDARD/VALUE
Optical Test	Spectrum Analysis	IES LM 79(CCT, lumen, CRI, SDCM, XY, wavelength)
	Photometric Distribution	IES LM 79(lumen intensity distribution & Lux diagram)
Temperature Test	Lumen Maintenance & Lifetime	IES LM84 & IES TM 28
	Nomal Temperature Test -25°C	UL 1598 & UL2388 & IEC60598-1 & IEC60598-2-21
	Abnormal Operation Test -70°C	UL 1598 & UL2388 & IEC60598-1 & IEC60598-2-21
Physics Test	Bending Test	Manufacturer-defined, 1000 cycles
	Swing Test	UL2388, >750 cycles
	Tensile Test	Manufacturer-defined, >the weight of light in max. running length by double ends feed
	Twist Test	Manufacturer-defined, 200 cycles
	IK08	IEC62262
	Ball Impact	UL 1598 & UL2388 & IEC60598-1 & IEC60598-2-21
Weathering Test	Swimming Pool Water Immersion Test	GB9667, PH6.8-7.6, free chlorine 0.3-0.6mg/L
	Sea Water Immersion Test	IEC 60598-1, Salinity 4%
	Salt Spray Test	IEC68-2-11
	Outdoor Exposure	Manufacturer-defined
Environment Test	Flame Resistant Test	UL94
	UV Exposure Test	ASTMG154, UVA@340nm
	IPX5 IPX6 IPX7 IPX8	IEC60529
	Temperature Shock Test	Manufacturer-defined, -40°C-60°C(typical temperature range)
	Constant Temperature Test	Manufacturer-defined, 70°C(typical temperature range)

Wilgex specializes in engineering LED flexible neon lights and offers both standard and customized services. If you have specific requirements, please contact our sales department.

Four-star quality assurance

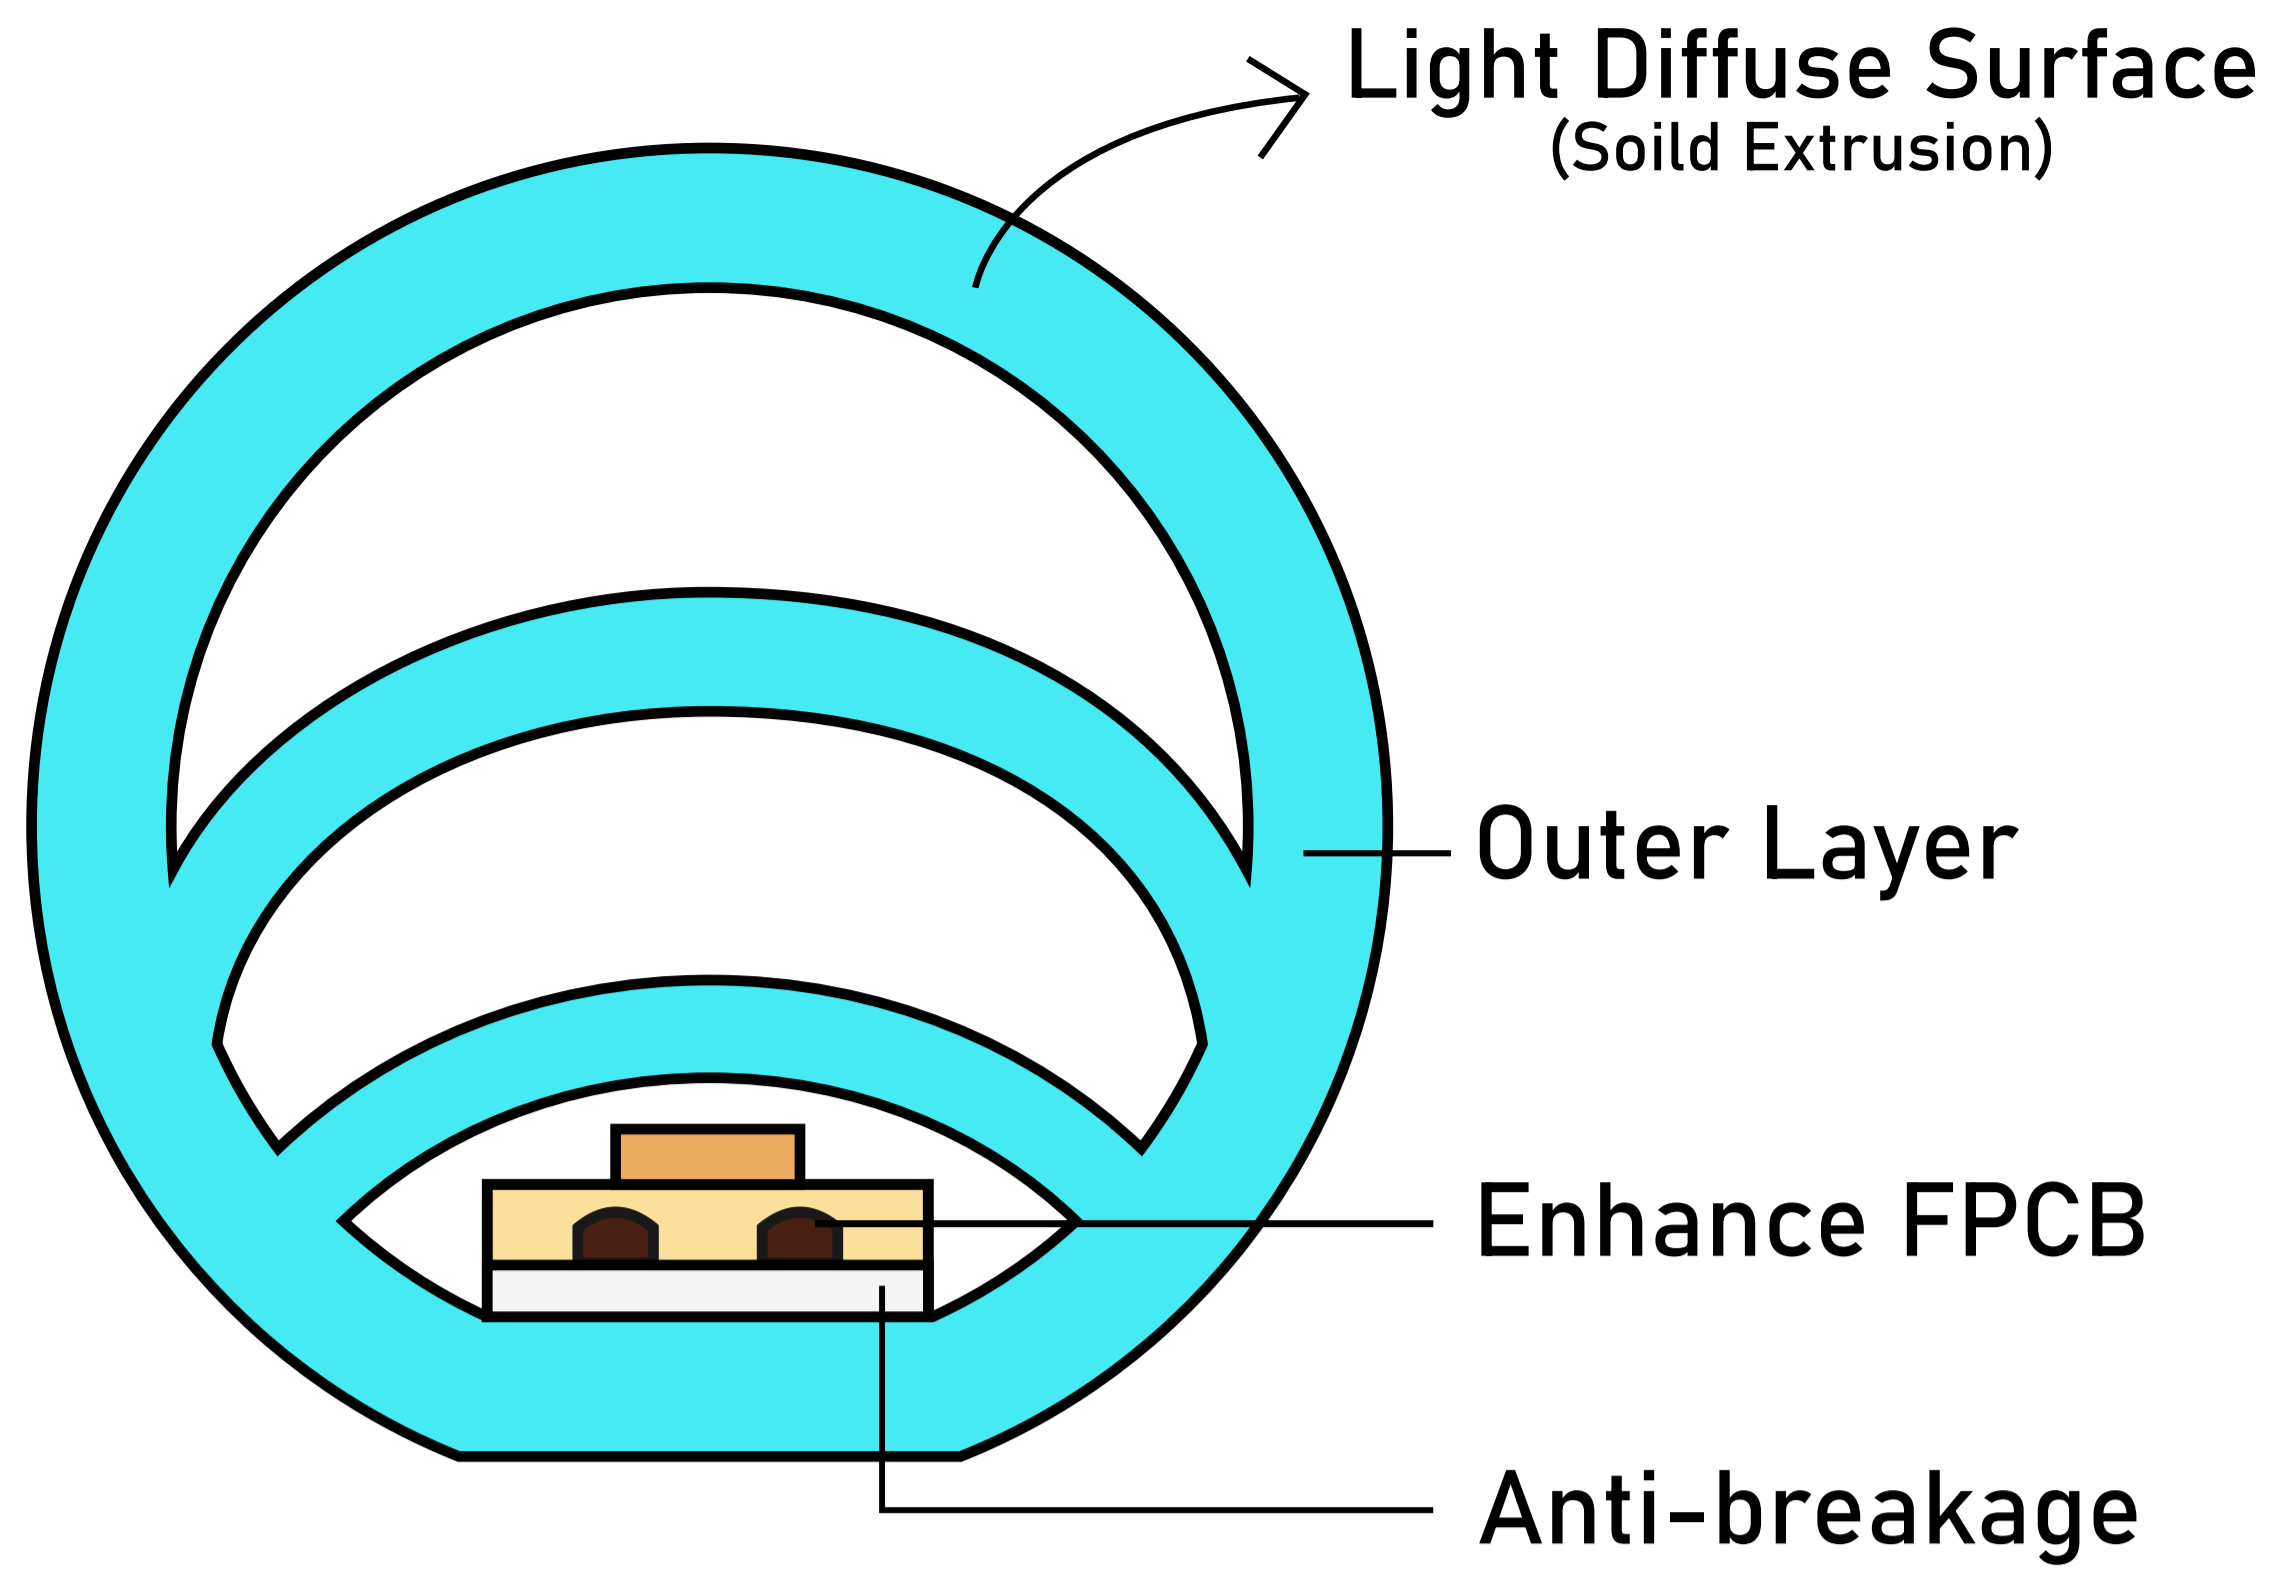


Unique Design

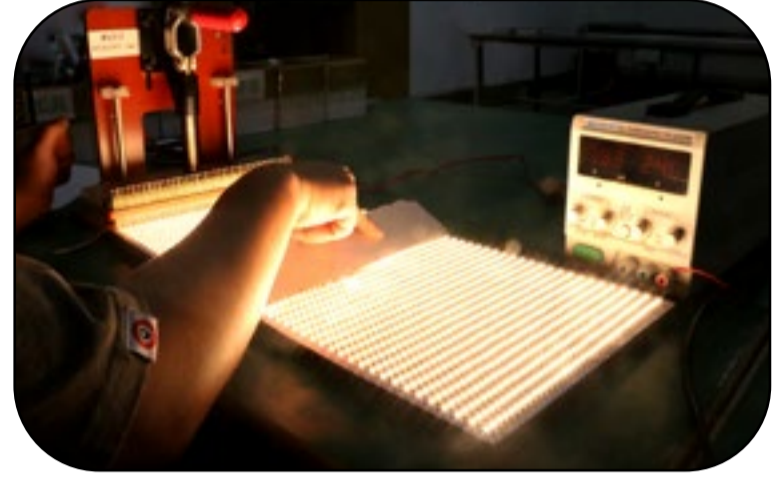

★ Enhance thickness FPC design principle




★ LED anti-death design

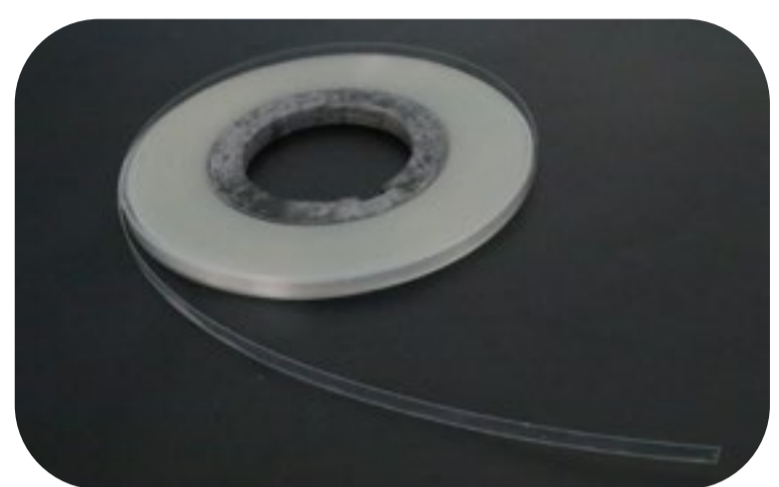

★ Add a break protection layer



★ Solid extrusion design for exterior

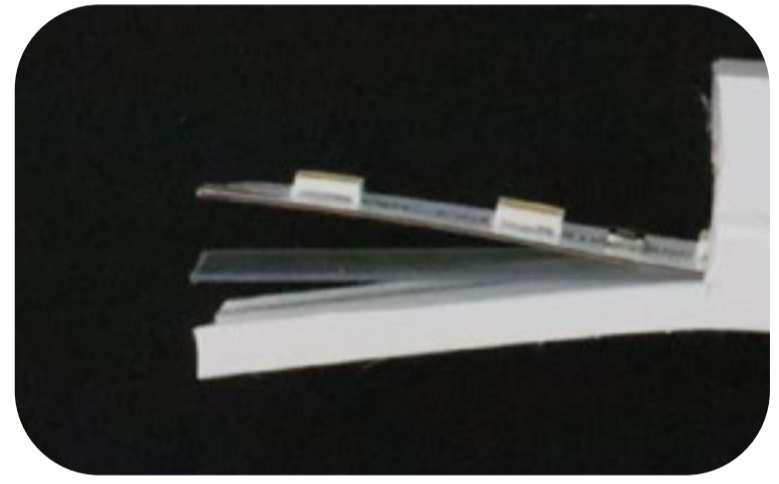

Features:


1. Size: The LED chips have a size of $\Phi 30\text{mm}$ in round shape.
2. High-density LED chips: The strips have a high density of LED chips, resulting in a brighter and more uniform light output
3. Flexible and bendable: Can be bent into various shapes and designs
4. Energy-efficient: Uses less power compared to traditional neon lights
5. Long lifespan: Can last up to 50,000 hours
6. Low heat emission: Does not emit as much heat as traditional neon lights
7. Wide color options: Available in a wide range of colors
8. Easy to install: Can be cut and connected to fit any desired length and shape
9. Durable and weather-resistant: Can withstand various weather conditions
10. Safe to use: Low voltage and does not contain hazardous materials like mercury
11. Cost-effective: Offers a cost-effective alternative to traditional neon lights.

Wide Color Options




Recommended Usage Scenarios :

1. Indoor and outdoor architectural lighting decoration
2. Landscape lighting
3. Advertising signage lighting
4. Stage and theater lighting
5. Car and motorcycle lighting
6. Holiday and event lighting decoration
7. Cove lighting
8. Edge-lit lighting
9. Retail and display lighting
10. Restaurant and bar lighting

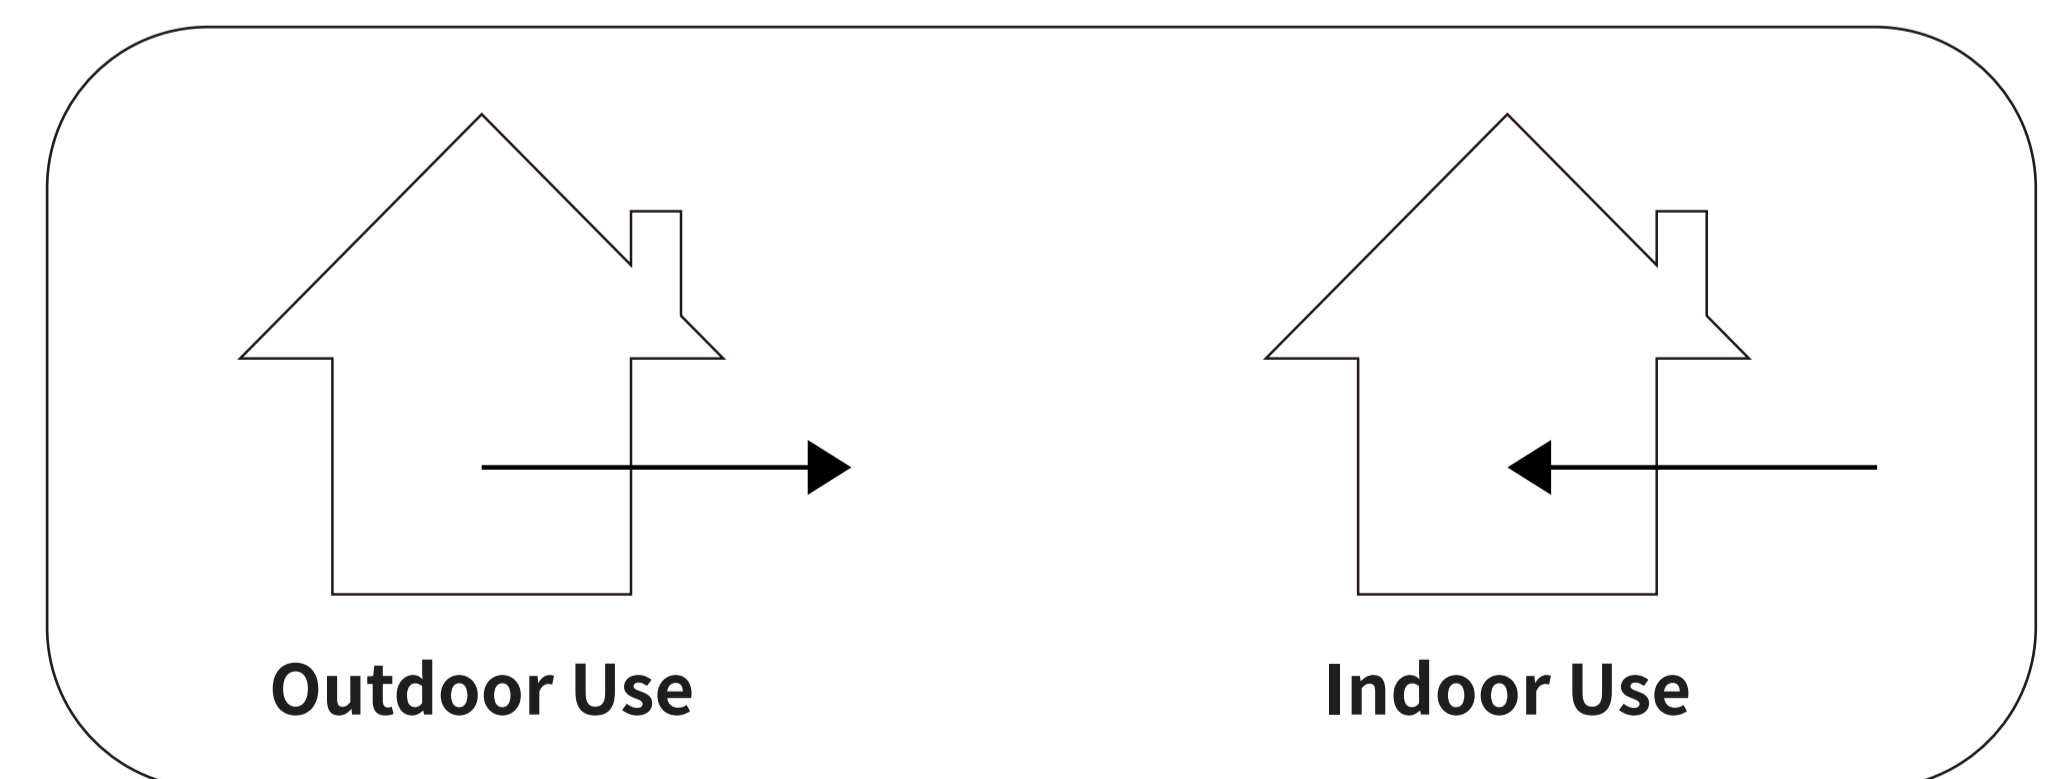

Please note that these are only recommended usage scenarios and it is important to consult the product specifications and guidelines before using flexible LED neon light strips in any application.

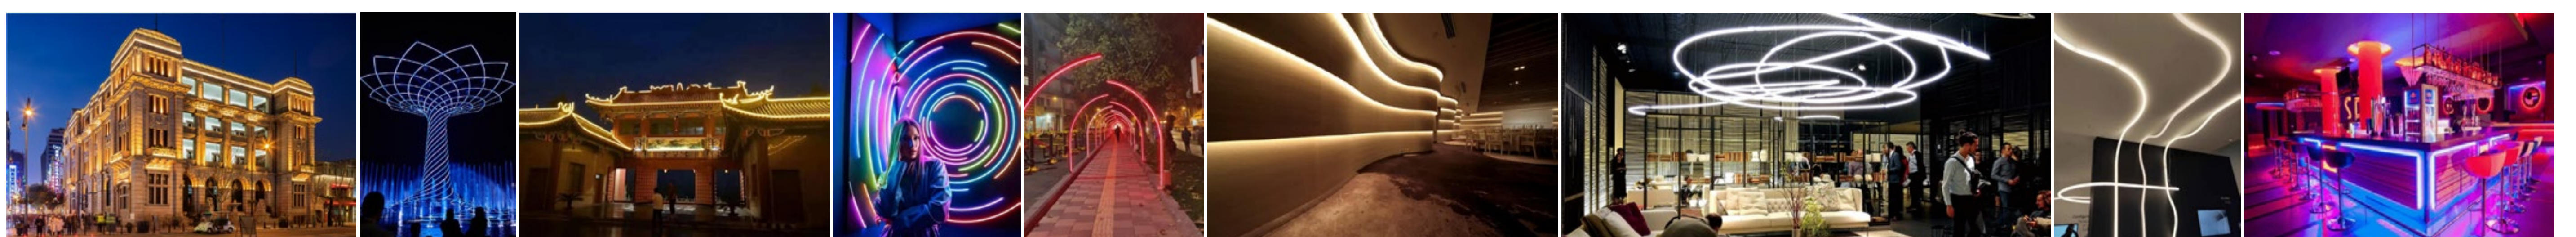


Package




Packing Method : Blister + White box
Quantity / Box : 5 meters / reel
Gross Weight :3.49 Kg (7.69LB)
Size of outer box : 52x 52x 7 cm
CBM : 0.019m³ / box

Mini Cutting Length & Connection Length

•Low Voltage (12V)

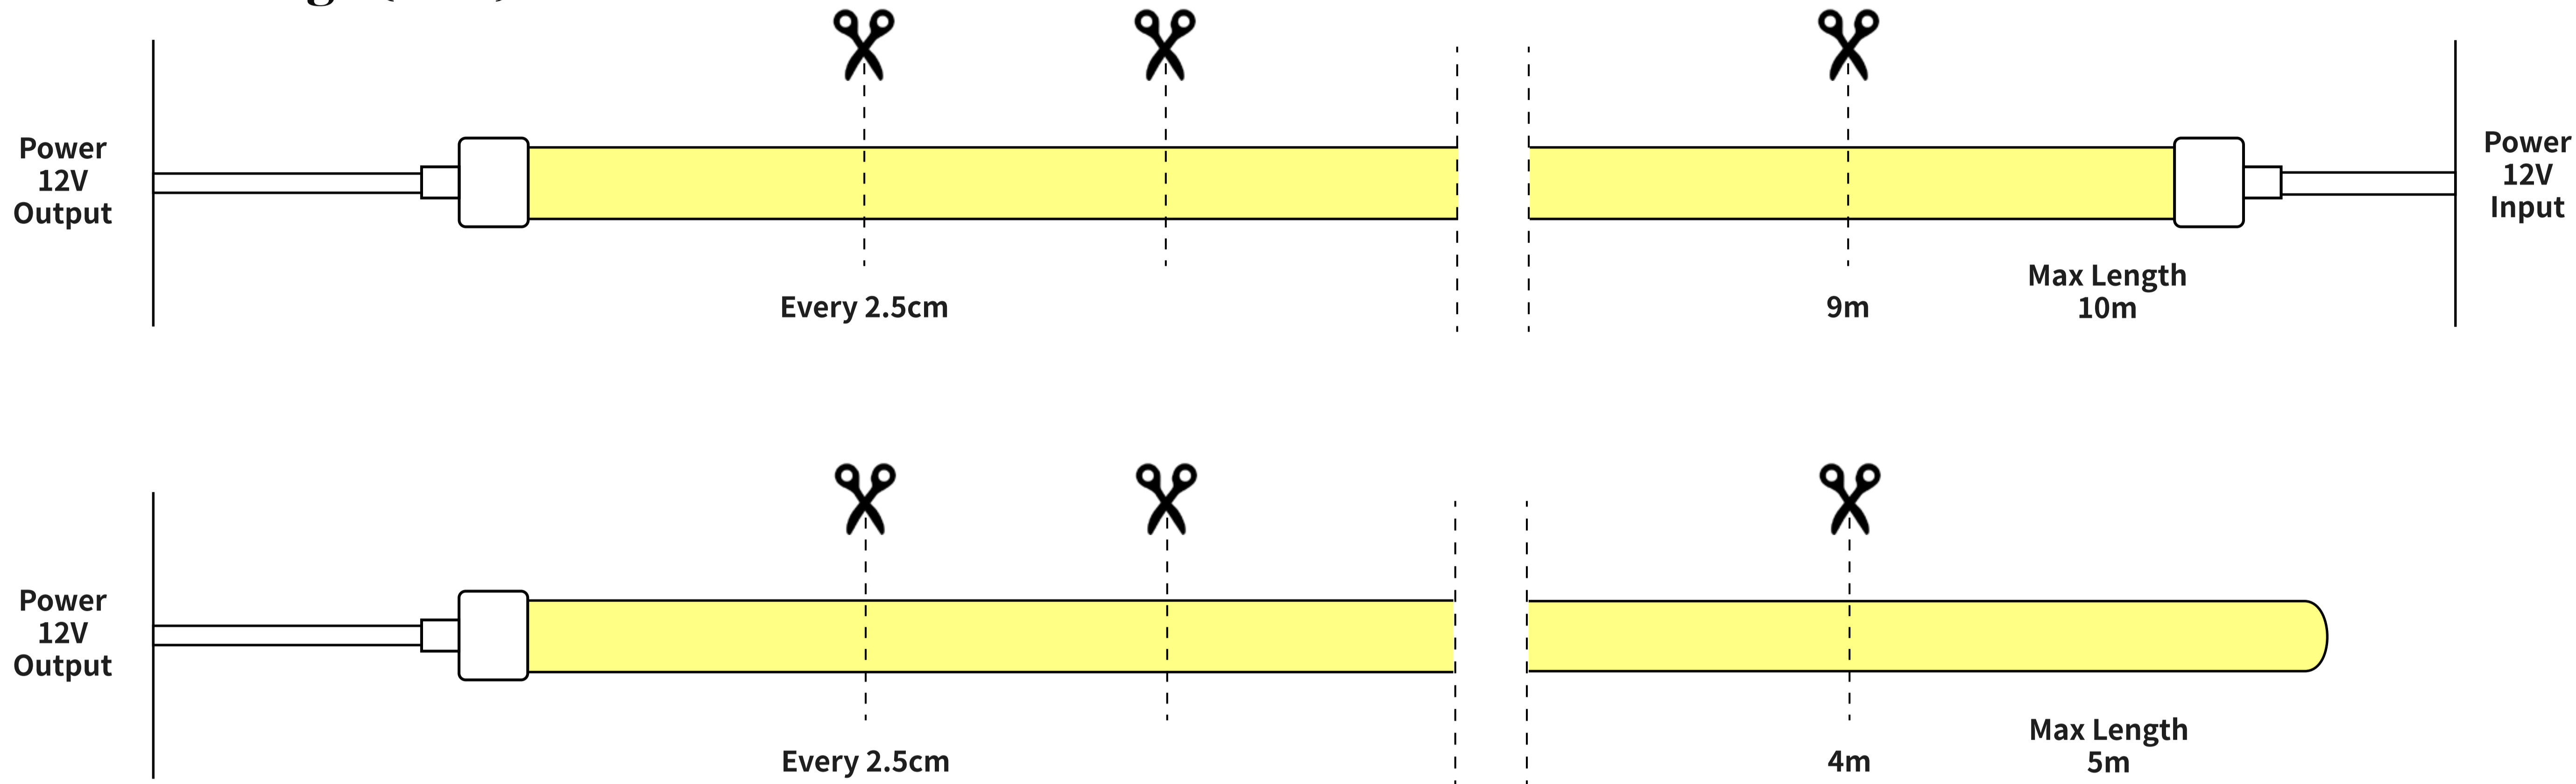

•Low Voltage (24V)

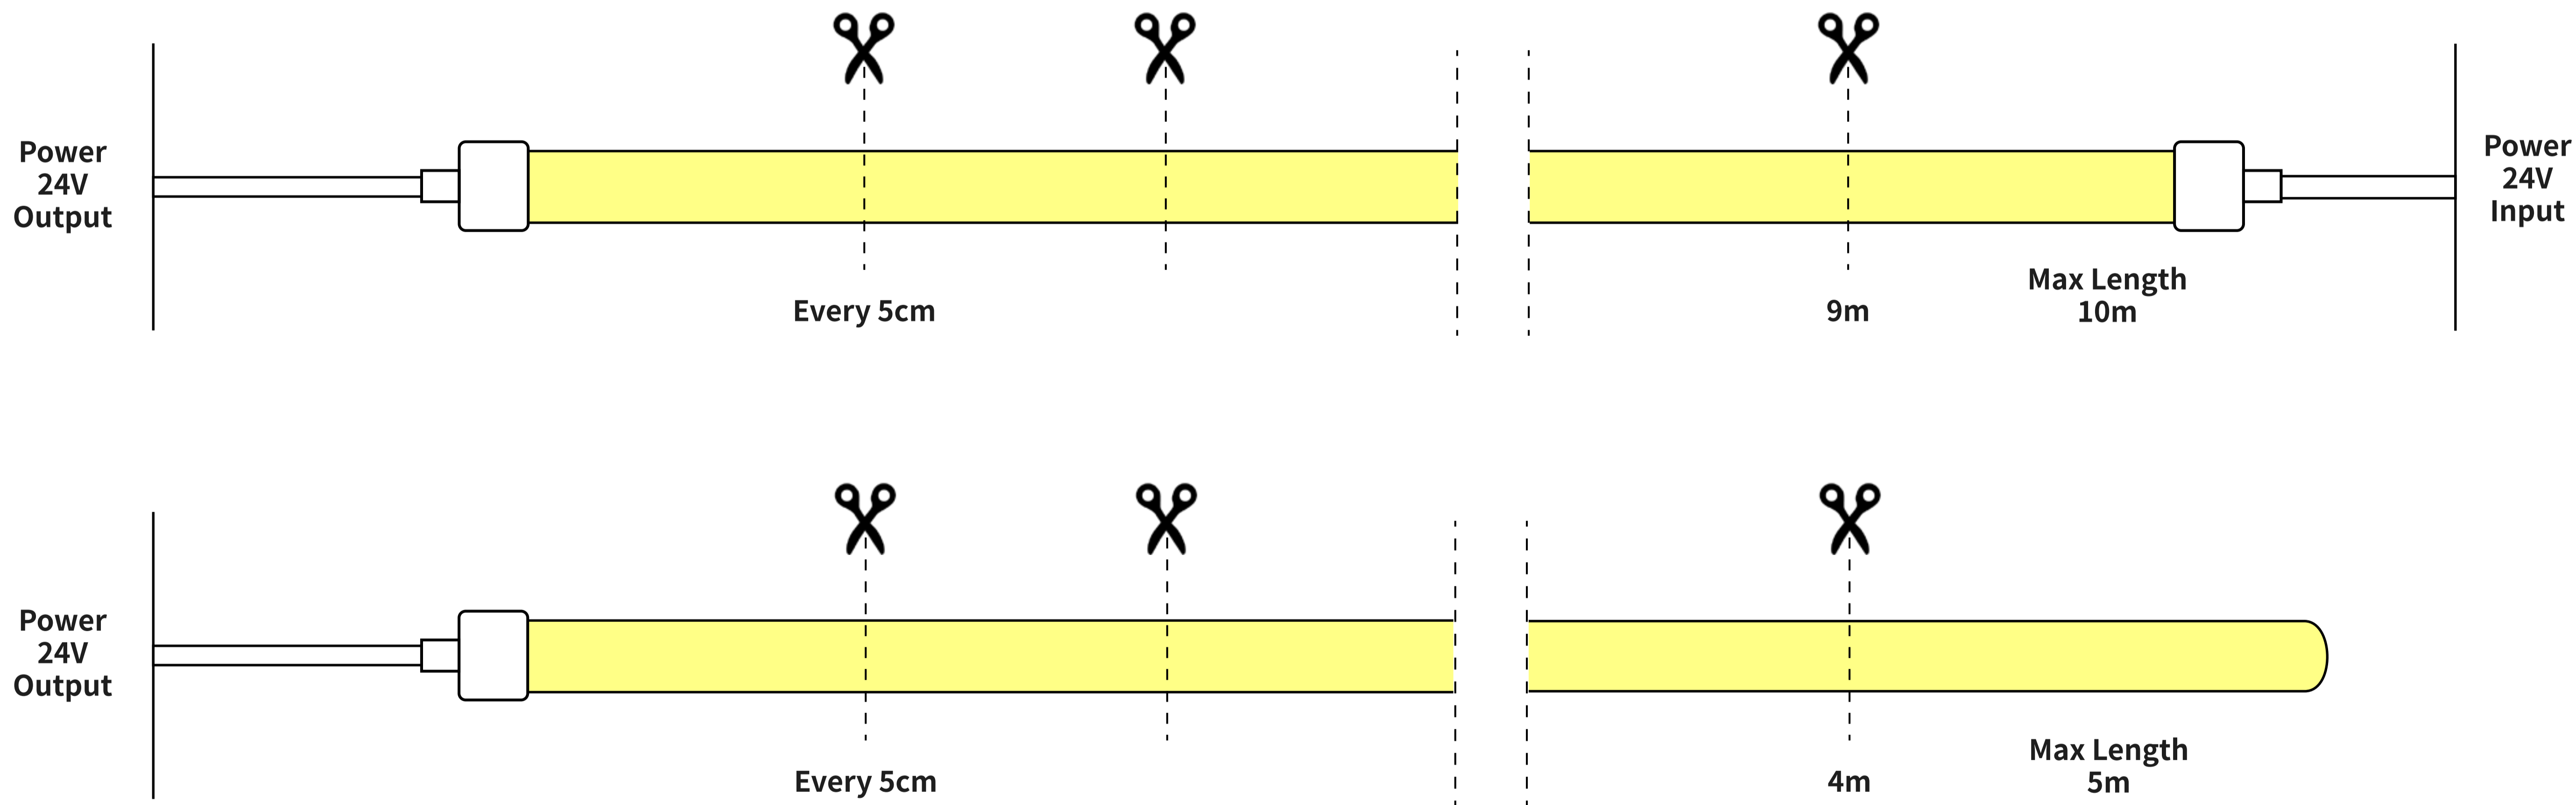

IP68 (Injection Mould Connector/Seamless Connection)

• Voltage (12V/24V)



STRAIGHT EXIT




BOTTOM EXIT

IP65 (DIY Connector)

- Voltage (24V)



STRAIGHT EXIT

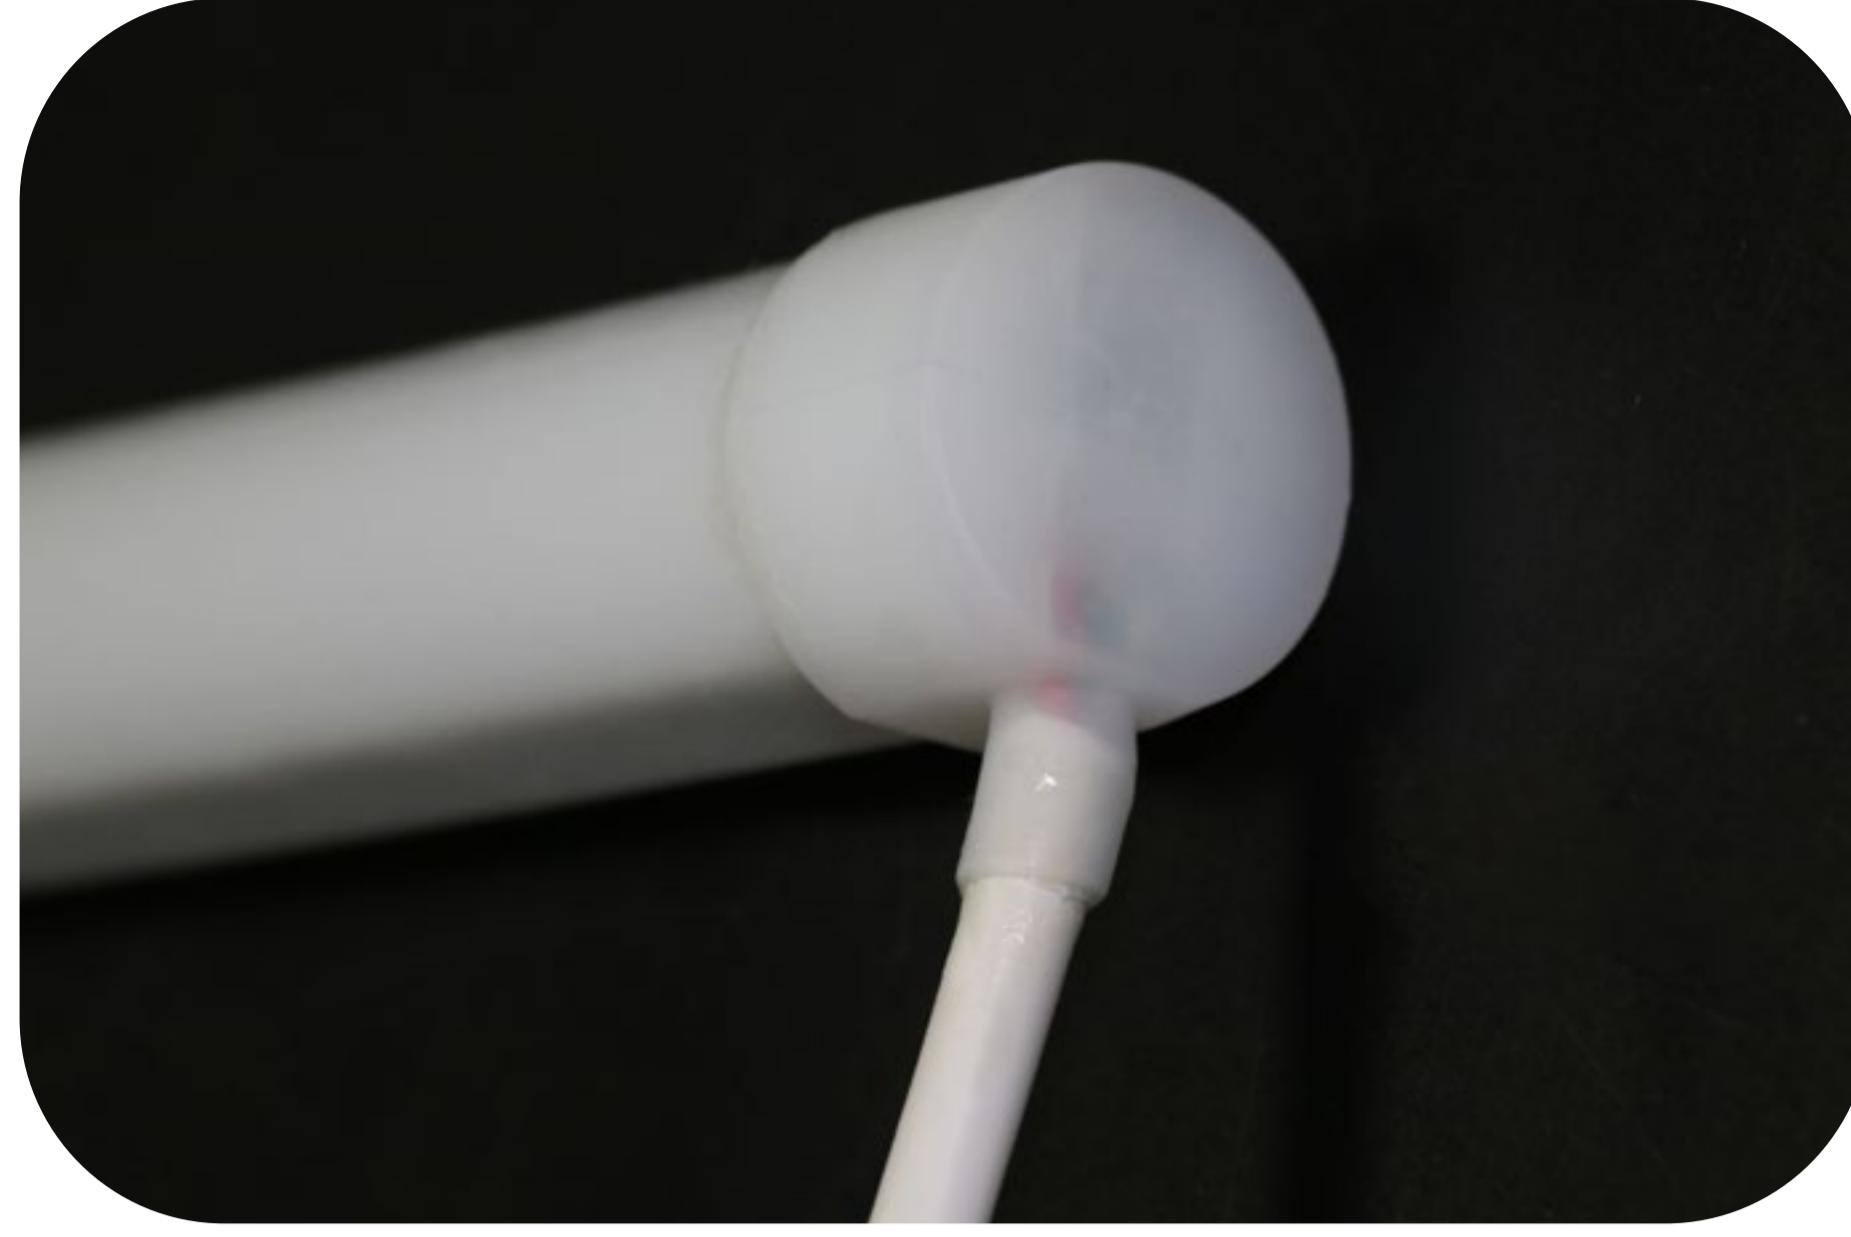


BOTTOM EXIT




END CAP


• Part Details

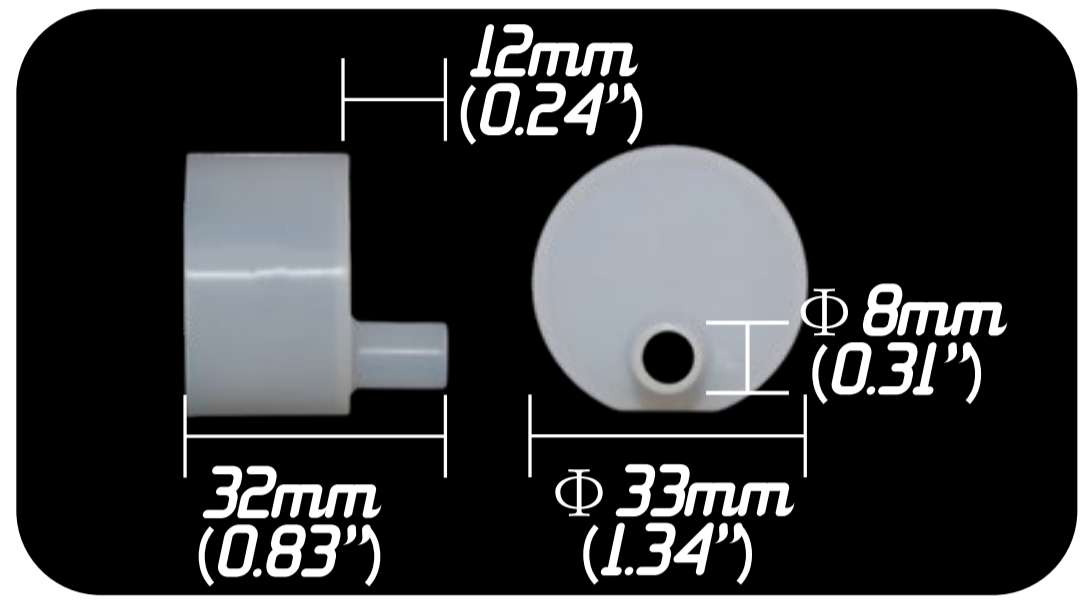

FRONT CONNECTION FITTING

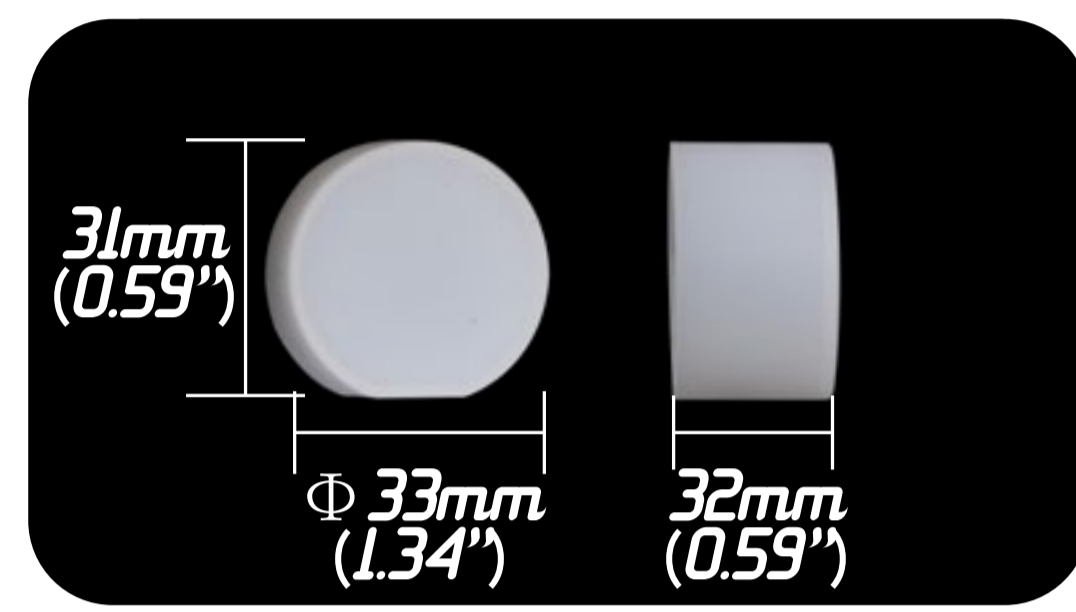

TAIL FITTING

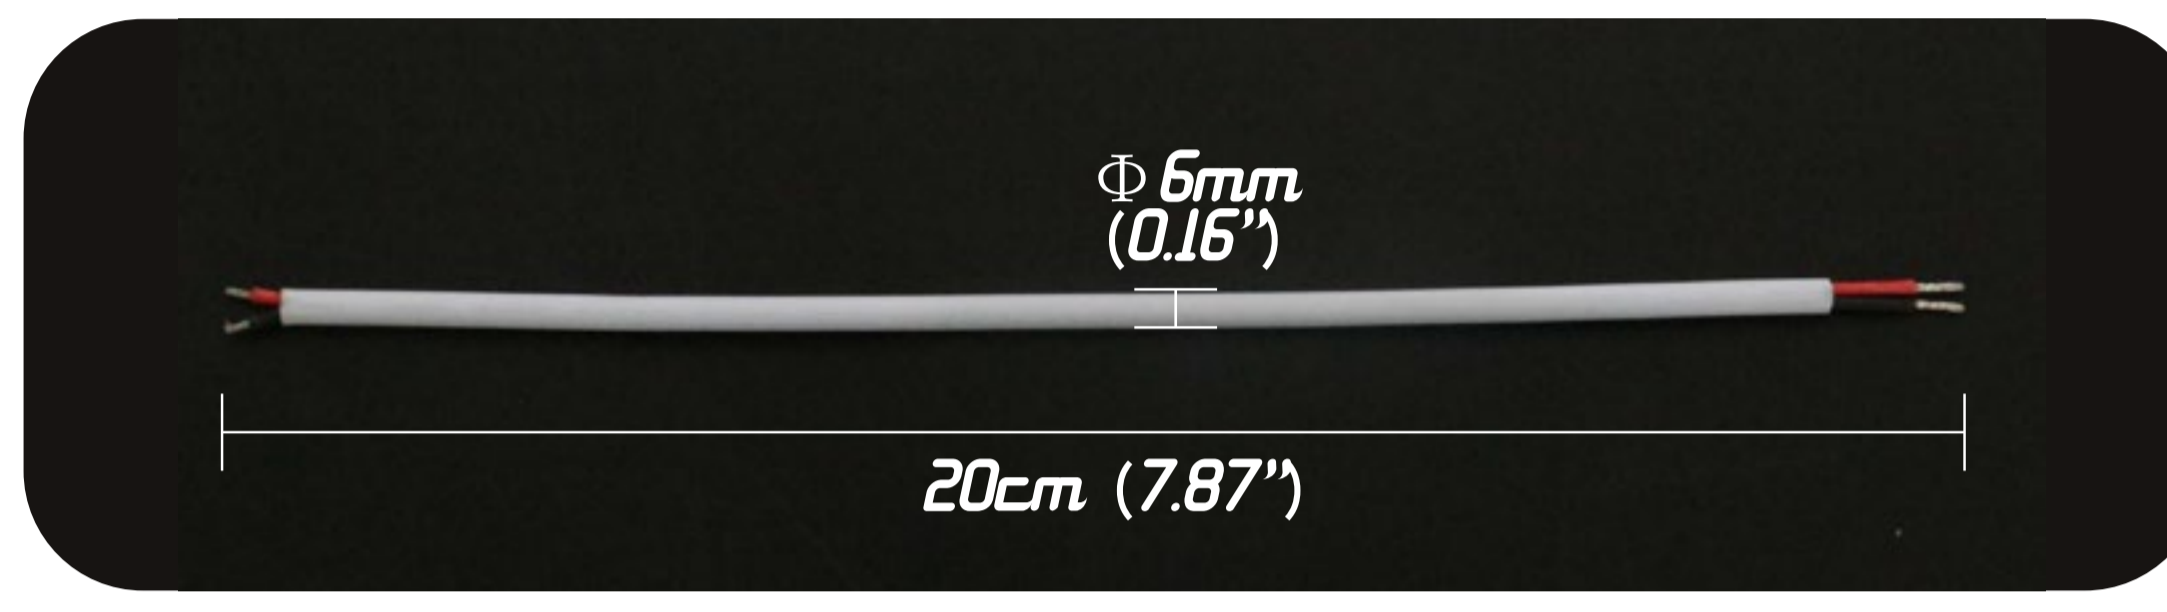

SILICONE POWER WIRE (2 CORDS)

Mounting Plastic Transparent Channel



3.8CM PLASTIC TRANSPARENT CLIP

